


FlexIT JW2K

TWO WIRE BRAID HOSE

JET WASH HOSE

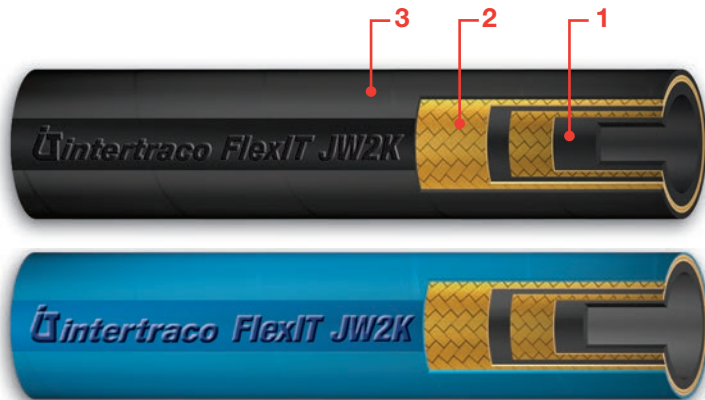

Construction

- 1 - Synthetic rubber tube;
- 2 - Two high tensile steel wire braid;
- 3 - Synthetic rubber cover (black or blue) pin pricked*;

Application

Medium pressure cleaning application with hot water;

Temperature range

-40°C to +150°C (-40°F to +300°F);

HOSE TYPE	Ø HOSE			MEDIUM REINFORCEMENT DIAMETER		OUTSIDE DIAMETER		WORKING PRESSURE		BURST PRESSURE		BEND RADIUS		WEIGHT	
	DN	INCH	SIZE	[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[mm]	[in]	[kg/m]	[lb/ft]
JW2KN-04	6	1/4"	04	11,3	0,445	13,4	0,528	400	5800	1600	23200	75	2,95	0,29	0,19
JW2KB-04															
JW2KN-05	8	5/16"	05	12,9	0,508	15,0	0,591	400	5800	1600	23200	85	3,35	0,34	0,23
JW2KB-05															
JW2KN-06	10	3/8"	06	15,0	0,591	17,1	0,673	400	5800	1600	23200	90	3,54	0,42	0,28
JW2KB-06															
JW2KN-08	12	1/2"	08	18,6	0,732	20,7	0,815	400	5800	1600	23200	130	5,12	0,58	0,39
JW2KB-08															

N= BLACK color cover

B= BLUE color cover

*Standard cover is wrapped, smooth cover on request;

* For fittings details please make reference to Intertraco fittings catalogues.

** Please refer to our crimping chart for more detailed application data.